


UNDERGROUND BULK TANK OPTIONS

An Underground tank provides you with a discreet solution – the whole tank is buried below ground leaving only the access cover visible. Ideal if you are short on outdoor space.

Below is the range of underground tanks CamGas can offer. Please note the maximum fill capacity of each tank is 85%.

Underground tanks are not recommended for poor drainage grounds.


Should you have any question please feel free to contact customer support on 01244 520551.

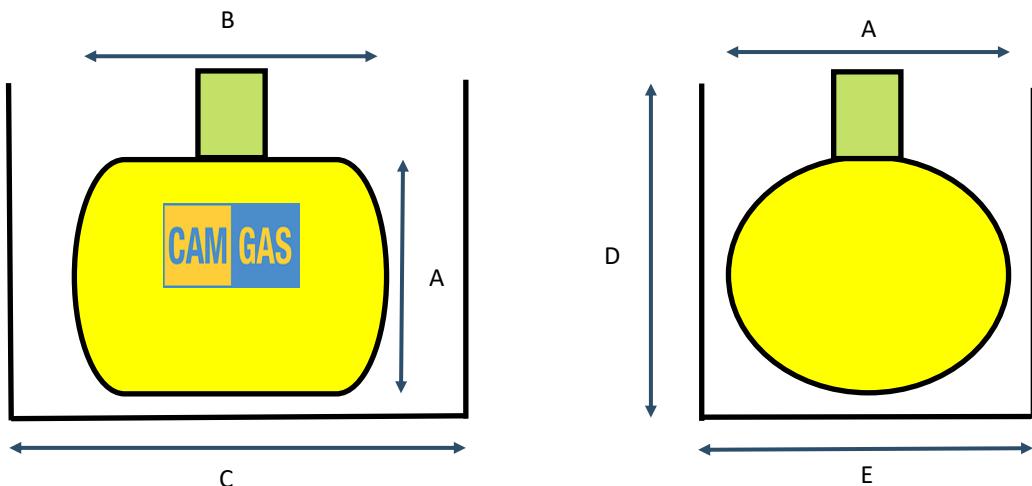

Tank Size (L)	1410	2200	4603
Application	The smallest of our tanks is suitable for low consumption domestic houses. Typically houses with less than five bedrooms.	This tank is suitable for larger consumption domestic property's. Typically property's with five or more bedrooms.	The largest of our underground tanks can be used for large metered estates and large scale commercial property's and process's.
Propane Capacity (KG)	600	1000	2000
Tank Diameter (A) (M)	1.0	1.0	1.2
Tank Length (B) (M)	2.12	3.05	4.4
Excavation Length (C)(M)	3.0	4.0	5.6
Excavation Depth (D) (M)	1.57	1.57	1.87
Excavation Width (E) (M)	2.0	2.0	2.2

BELLOW GROUND TANK SITING INFORMATION — REF 2.2

Failure to adhere to these instructions may delay or prevent your tank install.

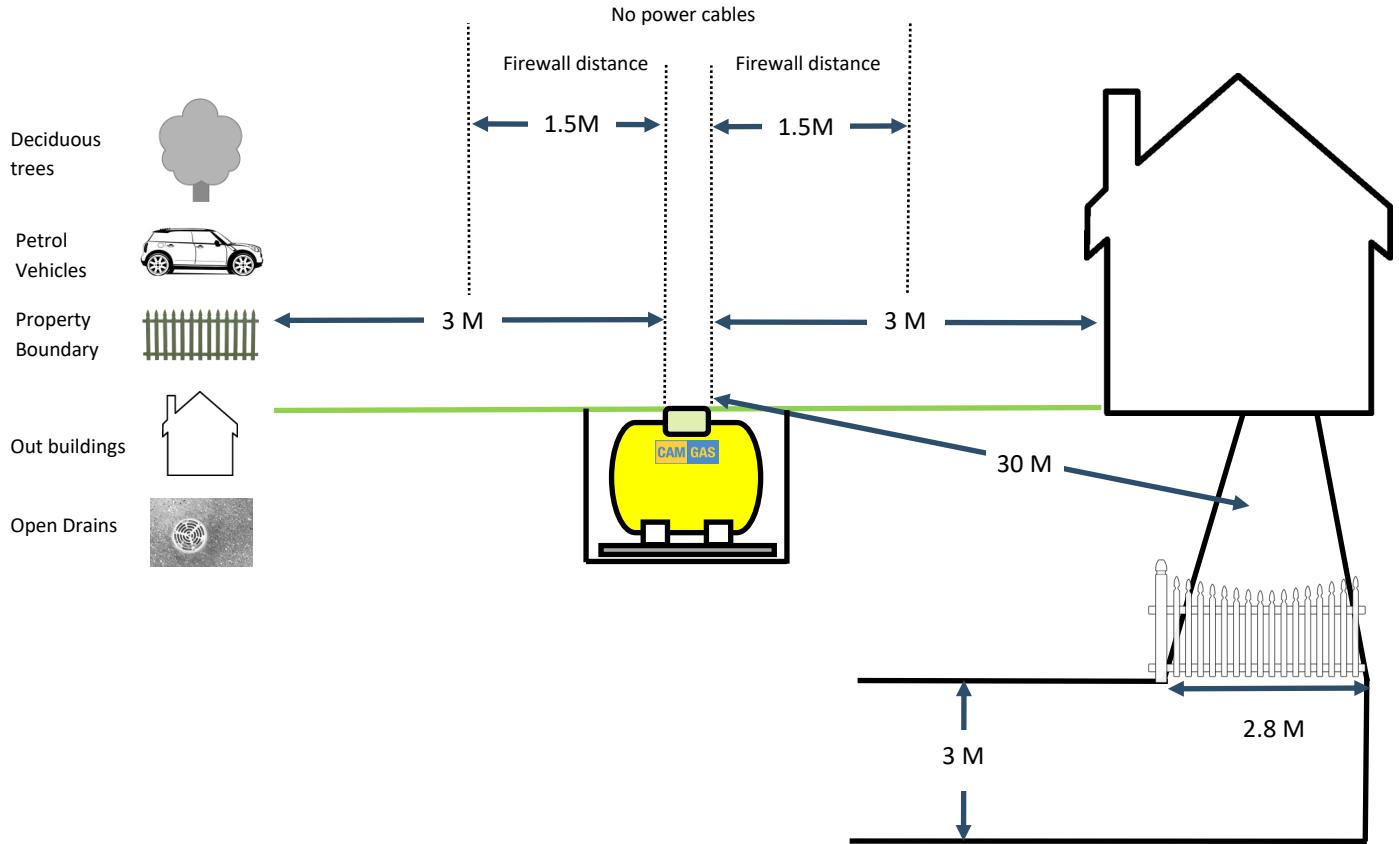

BELLOW GROUND TANK SITING REQUIREMENTS

The above will help ensure your tank is sited correctly. To do this the required safety distance between property, boundary and sources of ignition must be met as in the above diagram. **Please note the tank hood from which measurements are made is 1 meter in diameter.**


No civil groundworks should commence before site survey.

Should you be unsure or require any guidance please don't hesitate to contact customer support on 01244 520551.

FIREWALLS

Firewalls can be used to reduce the separation distance. They should have no openings and be constructed of brick, concrete or solid masonry. Some boundary walls can be classed as a firewall if they meet the requirements of fabrication and are imperforate.

The height and distance should exceed the 3M requirement on all angles. There can be a maximum of two firewalls and they can not be connected.



DELIVERY VEHICLE ACCESS

The tanker delivery requires the vessel to be within 30 meters from the point of filling, while filling the driver must have line of sight between the tanker and vessel.

The minimum gate access width is 2.8M, while the main access road needs to be 3M in width.